


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- Note
- 1.50 pieces per pack.
 - () are reference dimensions.
 - Please refer to the technical specification (ETAP-H1189-00) for the packing type.
 - Refer to these manuals for handling this connector.
 Cable assembly: ETAD-H0798-01
 Mating and unmating operation: ETAD-H1025-00
 - Screw size: M3
 Recommended torque: 0.3 to 0.5 N·m
 - There may be slight scratches or dents on the appearance, but this does not affect the function.
 - UL (File No. E52653)
 C-UL (File No. E52653)
 TÜV (Certificate No. R9950703) authorization article

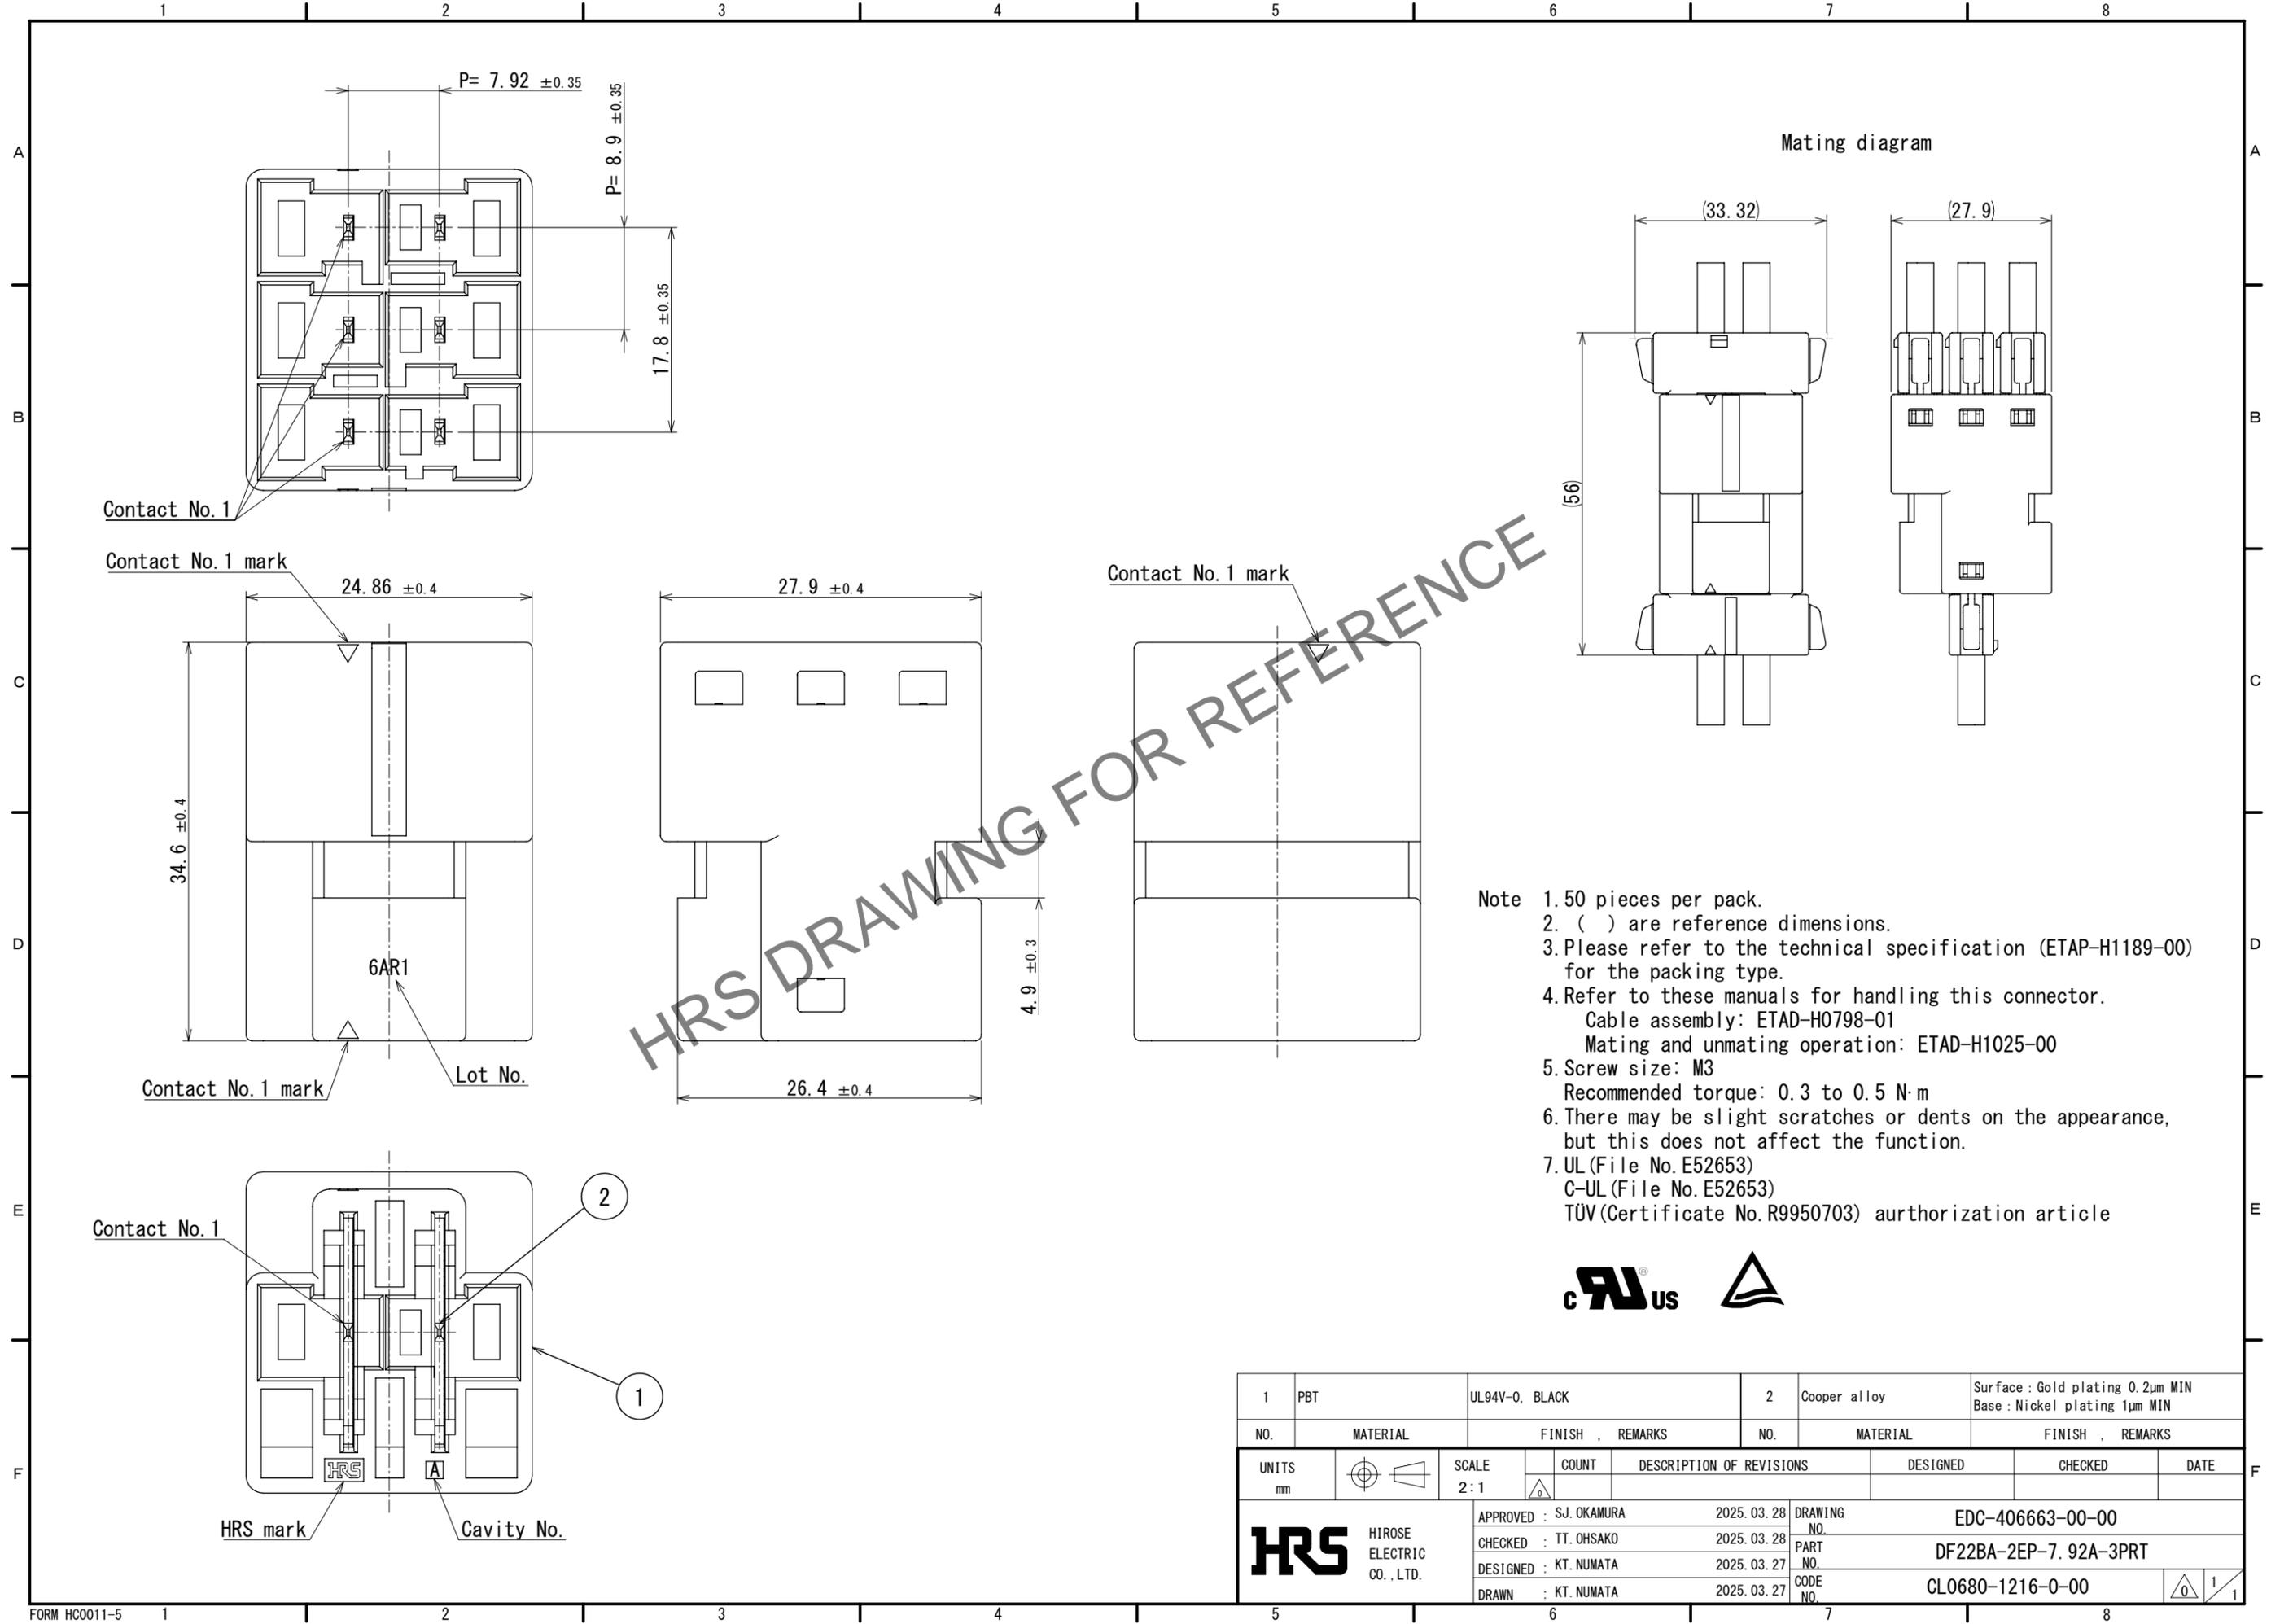

1	PBT	UL94V-0, BLACK	2	Cooper alloy	Surface : Gold plating 0.2µm MIN Base : Nickel plating 1µm MIN
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2:1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED
		APPROVED : SJ. OKAMURA	2025. 03. 28	DRAWING NO.	EDC-406663-00-00
HIROSE ELECTRIC CO., LTD.		CHECKED : TT. OHSAKO	2025. 03. 28	PART NO.	DF22BA-2EP-7. 92A-3PRT
		DESIGNED : KT. NUMATA	2025. 03. 27	CODE NO.	CL0680-1216-0-00
		DRAWN : KT. NUMATA	2025. 03. 27		